

Wireless I/O Interface Transmitter/Receiver Set RAD-ISM-900-...-UD



Data Sheet 1483B

August 2003

Features


- 1 watt transmit power
- Wireless conduit for one 4-20 mA and two digital signals
- Interference free - Frequency Hopping Spread Spectrum technology
- License free 902-928 MHz Industrial, Scientific and Medical (ISM) band
- Easy to use, wire in – wire out, no setup or programming
- Range: 600 – 1000 feet in-plant, no line-of-sight
- Class I, Division 2 approved for hazardous area installation (UL, CUL and CSA approved)

Applications

- SCADA systems
- Tank level
- PLC/RTU extensions
- Mills/quarries/factories
- Pump control
- Sensor monitoring
- Water/wastewater
- Utilities
- Oil and gas
- Irrigation systems
- Petro-chem

Benefits

- Reduce cost of labor and installation
- Eliminate conduit and wiring
- Reliable and dependable operation

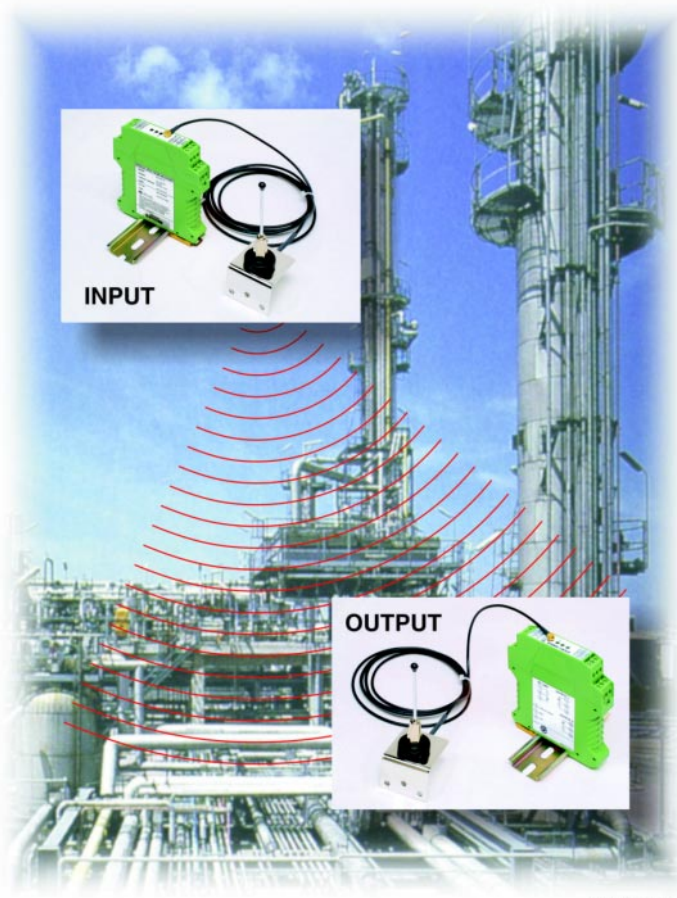

1483A001

Frequency Hopping Spread Spectrum Technology

The Phoenix Contact RAD-ISM-900-...-UD is an integrated radio & I/O module designed to eliminate cable and conduit for one 4-20 mA current loop and two digital signals in harsh industrial environments. This unique addition to the Phoenix Contact signal conditioning line utilizes 902-928 MHz ISM band spread spectrum frequency hopping technology to guarantee a license free, interference free link between remote devices and the control room. Costly cable and conduit runs on new projects, or retrofitting of existing systems, are eliminated and replaced with a maintenance free, reliable and versatile wireless solution.

Wireless I/O Interface Transmitter/Receiver Set RAD-ISM-900-...-UD

Table 1. Technical Specifications

RAD-ISM-900-...-UD	
Transmit power	1 watt
Range	600-1000 feet, in-plant, no line of sight 4-5 miles, line-of-sight, flat terrain, raised antennas 20+ miles, line-of-sight, flat terrain, professional propagation study, installation and directional antennas
Frequency	902-928 MHZ
Power source	12 V to 30 Vdc (regulated)
Power consumption	8.4 watt peak, 1.8 watt average (350 mA @ 24 Vdc peak, 75 mA @ 24 Vdc average)
Inputs	1 x 4-20 mA analog (250 input impedance) 2 x 5 to 30 Vac/dc digital (for 120 Vac discrete inputs use relays to convert to specified voltage levels. Consult factory for relay options)
RAD-ISM-900-...-UD	
Frequency	902-928 MHZ
Power Source	12 V to 30 Vdc (regulated)
Power consumption	3 watt (125 mA @ 24 Vdc)
Outputs	1 x 4-20 mA analog (12-bit resolution) 3 x 120 Vac 0.5 A digital (dry contact)
Max. Loop Impedance ...	450 to 1350 for power supply voltages of 12-30 Vdc Maximum Loop Impedance = $\frac{(\text{Supply Voltage} - 3)V}{20 \text{ mA}}$
Repeatability	0.02%
Accuracy	0.2% of full scale
General Specifications	
Temperature range	-40° to +70°C (-40° to +158°F)
Dimensions	102 x 114 x 17.5 (mm) 4 x 4.5 x 0.7 (inch)
Approvals	UL listed (Class 1, Division 2 Groups A, B, C and D) CSA approved

1483B004

Ordering Information

Part Description	Part Number
RAD-ISM-900-SET-UD System	28 67 10 2

Accessories Ordering Information

Part Description	Part Number
MINI-PS-100-240AC/24DC/1 (universal voltage input 1 A, 24 Vdc power supply)	29 38 84 0

Class I, Div. 2 Approved Power Supplies

QUINT PS 120AC/24DC/1 (1A,24VDC)	56 02 77 1
QUINT PS 120AC/24DC/2.5(2.5A,24VDC)	56 02 76 9
CM50-PS120/230/24DC/2.5IF	29 39 42 5
CM125-PS120/230/5IF	29 39 52 2

Class I, Div. 2 Approved Signal Converters

MCR-T/UI-E (thermocouple or RTD to 4-20 mA converter)	28 14 11 3
MCR-C-UI/UI-DCI (converters for current to voltage or vice versa)	28 10 91 3
MCR-S1/5-UI-SW-DCI-NC (transducer for 0-11 A AC/DC)	28 14 73 1
MCR-S10/50-UI-SW-DCI-NC (current transducer for 0-55 A AC/DC)	28 14 74 4
MCR-F-UI-DC (frequency converter for 0-120 kHz)	28 14 60 5

Headquarters, U.S.

Phoenix Contact Inc.
P.O. Box 4100
Harrisburg, PA 17111-0100
Technical Support and Information: (800) 322-3225
Fax: (717) 948-3475
Fax-On-Demand: (800) 944-9901
Email: info@phoenixcon.com
Web Site: <http://www.phoenixcon.com>

Headquarters, Canada

Phoenix Contact Ltd.
235 Watline Avenue
Mississauga, Ontario L4Z 1P3
Phone: (905) 890-2820
Fax: (905) 890-0180

The information given herein is based on data believed to be reliable, but Phoenix Contact Inc. makes no warranties expressed or implied as to the accuracy and assumes no liability arising out of its use by others. This publication is not to be taken as license to operate under, or recommendation to infringe, any patent.

