


SIEMENS

Ingenuity for life

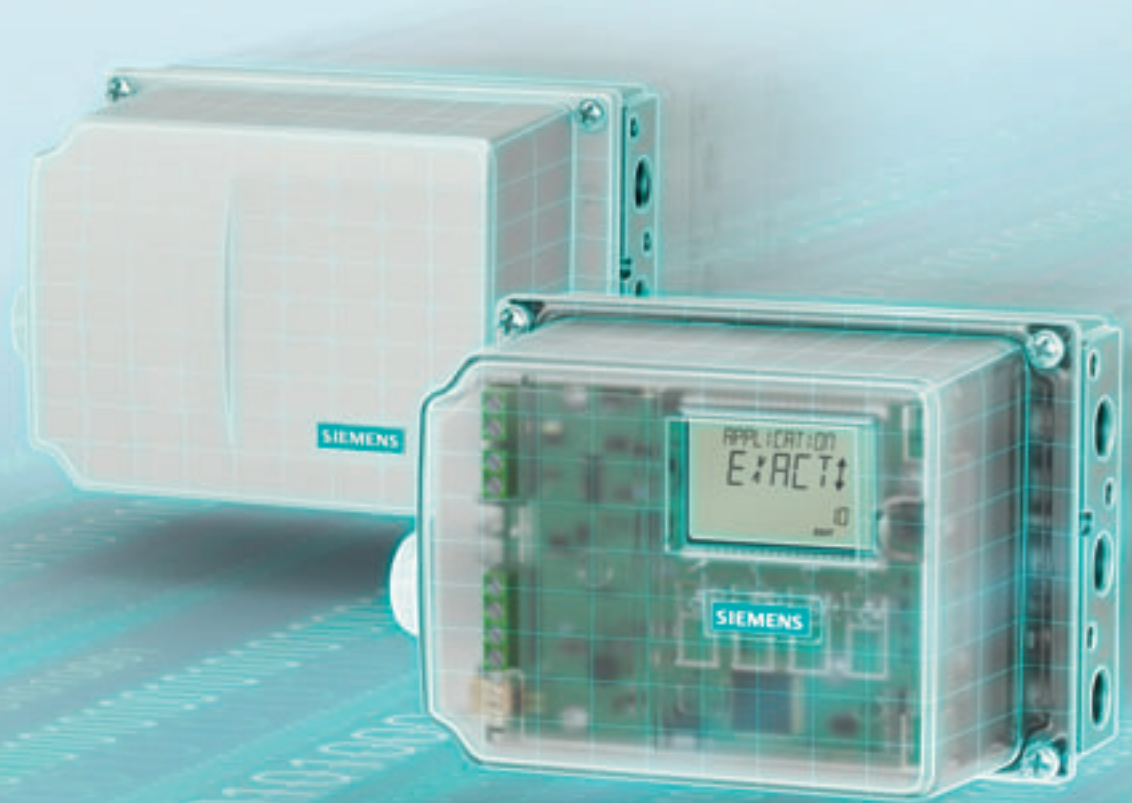

One that masters the essential: SIPART PS100


Easy and reliable valve control

[siemens.com/sipartps100](https://www.siemens.com/sipartps100)

Easy, fast, and reliable control for standard applications


Positioners are essential to the smooth and reliable operation of your process. They play a vital role in ensuring the best possible performance throughout your plant. A great example is our new electropneumatic positioner, the SIPART PS100. Its ease and speed of initialization make it a winner for valve manufacturers, the chemical industry, the energy sector, and many other fields. Special benefits of the SIPART PS100 include robust construction and ease of operation.

Easy to operate

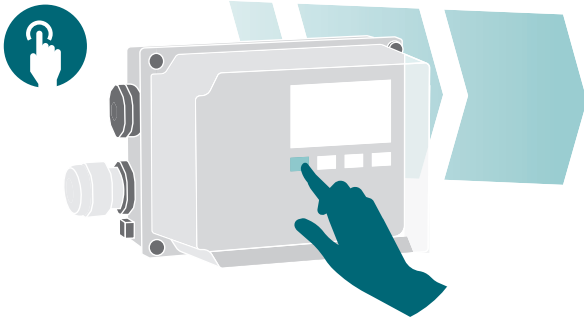

Quick to initialize


- » One-push initialization: initialize at the push of a button
- » Device automatically adjusts to the connected valve

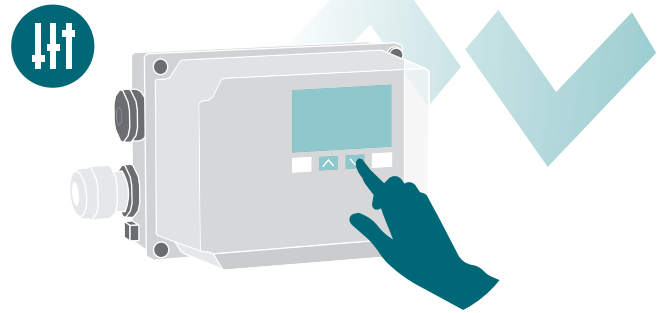

Easy selection of the control mode


- » Application parameters to select a range of modes, for example: precise control, on/off operation, booster applications
- » Maximum performance for every application

Simply robust

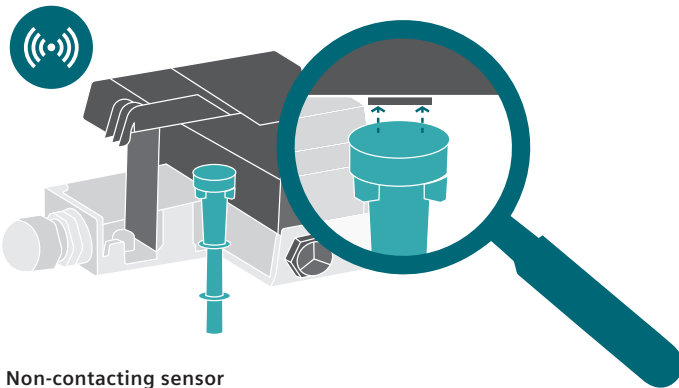


Non-contacting sensor

- » Vibration-resistant
- » Non-wearing
- » Accurate and continuous detection of valve position

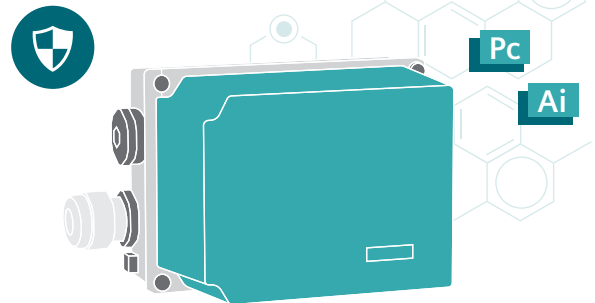

Ready for tough process conditions


- » Completely enclosed design
- » Two enclosure versions
 - Aluminum – resistant to mechanical influences
 - Polycarbonate – with a clear view of the screen

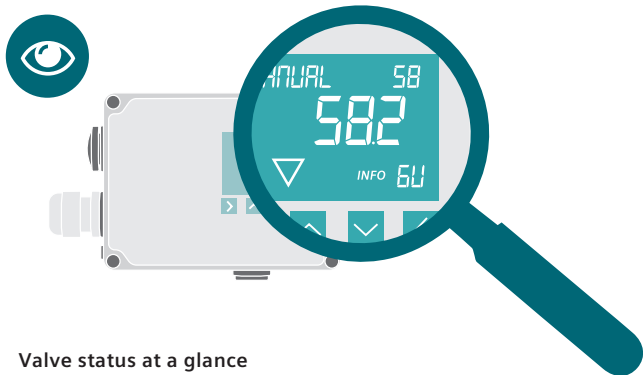

Valve status at a glance

- » Screen symbols in accordance with NAMUR NE107
- » Local operation with large screen and four buttons

Animated video
on user-friendliness

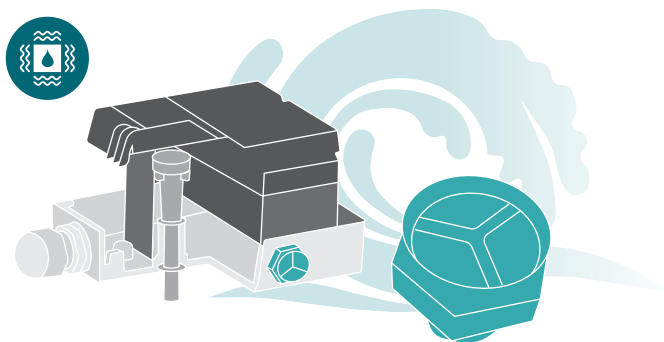

Non-corrosive sound absorber

- » Suitable for aggressive process conditions

Animated video
on robust design





Technical data	
Enclosure	Aluminum, aluminum/polycarbonate
Digital input/digital output	1 DI/1 DO
Computed value	4–20 mA
Stroke range	10 ... 130 mm (longer strokes on request) (0.12 ... 5.12")
Range of rotation	10 ... 100°
Required air quality	Class 3 as per ISO 8573-1
Ambient air temperature	–20 ... +80 °C (–4 ... +176 °F)
Pneumatic auxiliary power	1.4 to 7 bar (20.3 ... 101.5 psi)
Air throughput	
– Inlet to actuator (at $\Delta p = 6$ bar)	9.8 m ³ /h (5.76 SCFM)
– Outlet from actuator (at $\Delta p = 6$ bar)	19.2 m ³ /h (11.30 SCFM)
Degree of protection	Type 4X, IP66

**Published by
Siemens AG 2018**

Process Industries and Drives
Östliche Rheinbrückenstr. 50
76187 Karlsruhe
Germany

Article No.: PDPA-B10458-00-7600
Dispo 27900
WS 11184.0
Printed in Germany
© Siemens AG 2018

Subject to changes and errors. The information provided in this brochure contains descriptions or performance characteristics which, in case of actual use, do not always apply as described or which may change as a result of further development of the products. The desired performance characteristics are only binding if expressly agreed in the contract. Availability and technical specifications are subject to change without notice.

All product designations may be trademarks or product names of Siemens AG or supplier companies, the use of which by third parties for their own purposes may violate the rights of the owners.