


Series TL1000 Durafet® II Electrode Twist Lock Mounting

Model Selection Guide with Price Data

Honeywell Proprietary

Model Selection Guide
51-52-16-74 Issue 6

- Includes Durafet® pH electrode, twist-lock mounting and optional cap adapter
- Easy way to install/remove Durafet® pH electrodes from pipelines
- SST, Kynar or CPVC mounting bushing; suitable for wide range of applications
- The Durafet with Cap Adapter can only be used with the following instruments:
 - 9782P-01, Analyzer, APT2000/4000 Series and 7082 Analyzers
- Twist Lock mountings can be used with DirectLine® Sensor Modules. Select the appropriate remote Durafet® cable in the DL421 MSG. (Select "00" in Table III below)

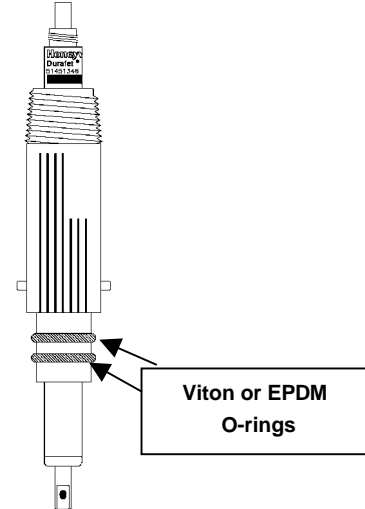

Instructions

- Select the desired key number. The arrow to the right marks the selection available.
- Make one selection per table, using the column below the proper arrow. A dot denotes unrestricted availability. A letter denotes restricted availability.

List Price equals the sum of all prices for all selections made.

Key Number I II III IV

- - - -

KEY NUMBER	Description	Selection	Availability	
	Twist Lock Electrode Mounting for Durafet II Electrodes	TL1	↓	<input type="checkbox"/>

TABLE I - Mounting Thread Size, Material, Tip Guard - (Note 1)

Thread Size	Material of Construction	Tip Guard		
3/4 " NPT	316 Stainless Steel	No	01	•
	Kynar	No	02	•
	CPVC	No	03	•
1" NPT	316 Stainless Steel	No	04	•
	316 Stainless Steel	Yes	05	•
	Kynar	No	06	•
	Kynar	Yes	07	•
	CPVC	No	08	•
	CPVC	Yes	09	•

TABLE II - Reference Electrode Type, Temperature Sensor, Electrode Part Number

Reference Electrode/ Seal Material	Temperature Sensor	Part Number (Note 2)		
Single Junction/Viton	8550 Ohm Thermistor	51451346-001	A	•
	100 Ohm RTD	51451346-002	B	•
	1000 Ohm RTD	51451346-003	C	•
Single Junction/EPDM	8550 Ohm Thermistor	51451346-007	G	c

TABLE III - Cable Type, Length

Cable Type	Cable Length	Selection	Availability
None		00	•
With Cap Adapter (Direct Input to 9782/APT)	4 feet (1,22 meters)	01	•
	8 feet (2,44 meters)	02	•
	12 feet (3,66 meters)	03	•
	20 feet (6,10 meters)	04	•
	50 feet (15,24 meters)	05	•
Without Cap Adapter (Preamp Required)	4 feet (1,22 meters)	11	•
	8 feet (2,44 meters)	12	•
	12 feet (3,66 meters)	13	•
	20 feet (6,10 meters)	14	•
	50 feet (15,24 meters)	15	•

TABLE IV - OPTIONS

Tagging	Linen Customer I.D. Tag - (limit to 3 lines, 22 spaces per line)	L	•
	Stainless Steel Customer I.D. Tag - (limit to 3 lines, 22 spaces per line)	S	•

Notes:

1. For Pipe Mounting Adapter only, determine P/N from Accessories Table below and obtain price from order entry system.
2. For Replacement Electrode specify associated part number and price from Table II.

RESTRICTIONS

Restriction Letter	Table	Available Only With Selection
c	I III	01 00 or 04

Accessories and Replacement Parts

Description	Part Number
pH Buffer Solutions - one pint	
4.01	31103001
6.86	31103002
9.18	31103003
Pipe Mounting Adapter	
3/4" NPT Thread	
316 SS without guard	51451355-001
Kynar without guard	51451355-002
CPVC without guard	51451355-003
1" NPT Thread	
316 SS without guard	51451355-004
316 SS with guard	51451355-005
Kynar without guard	51451355-006
Kynar with guard	51451355-007
CPVC without guard	51451355-008
CPVC with guard	51451355-009