


Configuration Card

250 mm Strip Chart Recorder

CCPLEN-6199
07-98
ISSUE 3

FUNCTION KEYS

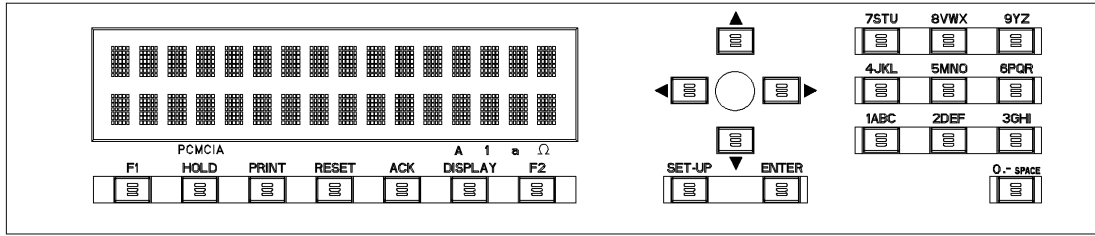

F1	HOLD	PRINT	RESET	ACK	DISPLAY	F2
Immediate action key configurable	To hold the display on a current channel. Use keys to change the channel.	To choose an immediate printing action. The choices are: - Inhibit/Printing - Reset paper length - Change speed/int 2 to speed/int 1 - Print date & time - Snap shot trace - Chart advance - Change group B to A - Change group A+B to B - Snap shot logic - Snap shot math - Start archive / stop archive - Remove PCMCIA	Math Occurrence Reset PCMCIA	To acknowledge all latching alarms relays	To choose the display type in run mode or to escape from configuration to run mode	Immediate action key configurable and to select the type of characters in configuration mode
SET-UP ENTER These keys allow you to move to every matrix of your configuration and select some options.		To move to configuration mode or to return from parameter configuration to the sub-matrix. To confirm your selected action. An ALPHANUMERIC keypad with either capital and small print letters, digits or special characters.				

PRINCIPLE OF PRODUCT CONFIGURATION

