

Echomax® XPS/XCT transducers use ultrasonic technology to monitor level changes in a wide range of liquids and solids applications. All of these transducers can be immersed in the process, are resistant to steam and harsh chemicals and can be installed without flange mounting.

The XPS series offers models for various distances up to 40 m (130 ft.) and up to a maximum temperature of 95°C (203°F). Two models have FM Class 1, Div. 1 approvals for applications up to a distance of 15 m (50 ft.).

In applications that require higher temperature, the XCT series can monitor level up to a distance of 12 m (40 ft.) and up to a maximum temperature of 145°C (293°F).

During operation, Echomax transducers emit acoustic pulses in a narrow beam perpendicular to the transducer face. The level monitor measures the time between the pulse and its reflection (echo) to calculate distance.



Product Features

- Built-in temperature compensation
- Low ringing – cuts blanking distance
- Closed cell foam – immune to moisture and temperature changes
- Self-cleaning and low maintenance
- 2-wire interconnection
- Chemically resistant
- FM approved versions available
- Hermetically sealed

Technical Specifications

	XPS-10	XPS-10F	XPS-15	XPS-15F	XPS-30	XPS-40	XCT-8	XCT-12
Range	0.3 to 10 m (1 to 33 ft.)	0.3 to 10 m (1 to 33 ft.)	0.3 to 15 m (1 to 50 ft.)	0.3 to 15 m (1 to 50 ft.)	0.6 to 30 m (2 to 100 ft.)	0.9 to 40 m (3 to 130 ft.)	0.45 to 8 m (1.5 to 26 ft.)	0.45 to 12 m (1.5 to 40 ft.)
Frequency	43 kHz	43 kHz	43 kHz	43 kHz	30 kHz	22 kHz	43 kHz	43 kHz
Beam Angle	12°	12°	6°	6°	6°	6°	12°	6°
Pressure	8 bar (120 PSI)	8 bar (120 PSI)	8 bar (120 PSI)	8 bar (120 PSI)	8 bar (120 PSI)	8 bar (120 PSI)	8 bar (120 PSI)	8 bar (120 PSI)
Environmental								
• Location	indoor/outdoor	indoor/outdoor	indoor/outdoor	indoor/outdoor	indoor/outdoor	indoor/outdoor	indoor/outdoor	indoor/outdoor
• Altitude	2000 m max.	2000 m max.	2000 m max.	2000 m max.	2000 m max.	2000 m max.	2000 m max.	2000 m max.
• Ambient Temp.	-40 to 95°C (-40 to 203°F)	-20 to 95°C (-4 to 203°F)	-40 to 95°C (-40 to 203°F)	-20 to 95°C (-4 to 203°F)	-40 to 95°C (-40 to 203°F)	-40 to 95°C (-40 to 203°F)	-40 to 145°C (-40 to 293°F)	-40 to 145°C (-40 to 293°F)
• Pollution Degree	4	4	4	4	4	4	4	4
Construction								
• Material	Kynar®	Kynar®	Kynar®	Kynar®	Kynar®	Kynar®	Kynar®	Kynar®
• Colour	Blue	Grey	Blue	Grey	Blue	Blue	White	White
• Mounting	1" NPT or BSP	1" NPT	1" NPT or BSP	1" NPT	1.5" universal thread (NPT or BSP)	1.5" universal thread (NPT or BSP)	1" NPT or BSP	1" NPT or BSP
• Cable	2 wire twisted pair/braided and foil shielded, 0.5 mm ² (20 AWG) PVC jacket						2 wire twisted pair/braided and foil shielded, 0.5 mm ² (20 AWG) silicone jacket	
Weight	0.8 kg (1.8 lbs.)	0.8 kg (1.8 lbs.)	1.3 kg (2.8 lbs.)	2 kg (4.4 lbs.)	4.3 kg (9.5 lbs.)	8 kg (18 lbs.)	0.8 kg (1.7 lbs.)	1.3 kg (2.8 lbs.)
Supply Source	Transducer shall only be supplied by Milltronics certified controllers.							
Separation	365 m (1200 ft.)	365 m (1200 ft.)	365 m (1200 ft.)	365 m (1200 ft.)	365 m (1200 ft.)	365 m (1200 ft.)	365 m (1200 ft.)	365 m (1200 ft.)
Approvals	CE*, CSA, FM, SIRA/CENELEC	FM Class I Div 1, Group A, B, C and D, Class II Div 1, Group E, F and G, Class III.	CE*, CSA, FM, SIRA/CENELEC	FM Class I Div 1, Group A, B, C and D, Class II Div 1, Group E, F and G, Class III.	CE*, CSA, FM, SIRA/CENELEC	CE*, CSA, FM, SIRA/CENELEC	CE*, CSA, FM, SIRA/CENELEC	CE*, CSA, FM, SIRA/CENELEC

* EMC performance available upon request.

Range specifications are "typical". Actual range is dependent upon installation conditions. Maximum power is radiated axially (perpendicular) from the transducer face in a line referred to as the axis of transmission. Where power is reduced by half (-3 dB), a conical boundary defining the sound beam, centered about the axis of transmission, is established.

Specifications are subject to change without notice.

Echomax XPS and XCT Transducers





Dimensions

Standard

Optional:
Split Flange

Bonded Flange


Submergence Shield




Dimensions	Model			
	XPS-10	XPS-15	XPS-30	XPS-40
A	86 mm (3.386")	119 mm (4.685")	173 mm (6.811")	206 mm (8.110")
B	122 mm (4.803")	132 mm (5.197")	198 mm (7.795")	229 mm (9.016")
C	To suit ANSI, DIN and JIS			N/A
D	128 mm (5.039")	138 mm (5.433")	204 mm (8.031")	N/A
E	124 mm (4.882")	158 mm (6.220")	N/A	N/A
F	152 mm (5.984")	198 mm (7.795")	N/A	N/A

Wiring


Direct Connection

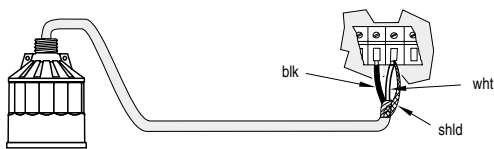


2 Wire Connection

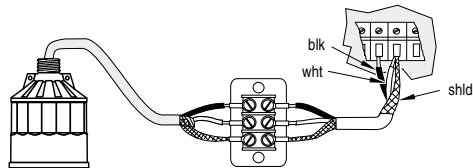


Coaxial Connection

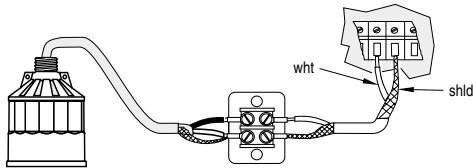

3 Terminal Direct*

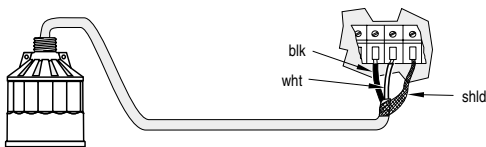

3 Terminal Extension*

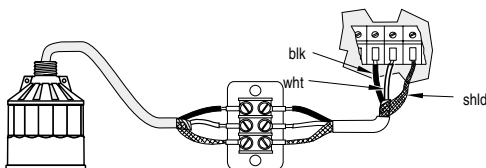

*For EnviroRanger ERS 500

Mounting

Mount the transducer so that it is above the maximum material level by at least the blanking value.

On liquid applications, the transducer must be mounted so that the axis of transmission is perpendicular to the liquid surface.

On solids applications, a Milltronics Easy Aimer should be used to facilitate aiming the transducer.

Mounting should be hand-tightened and installation secured by connecting a safety chain from the transducer to a structural member.

Consider the optional *temperature sensor* when mounting the transducer.

Interconnection

Do not route cable openly or near high voltage or current runs, contactors and SCR control drives.

For optimum isolation against electrical noise, run cable separately in a grounded metal conduit.

Seal all thread connections to prevent ingress of moisture.



Australia	Tel.: +61 3-9695-2400	Fax: +61 3-9695-2450
Belgium	Tel.: +32(0)3326 45 54	Fax: +32(0)3326 05 25
Canada	Tel.: +1 705-745-2431	Fax: +1 705-741-0466
France	Tel.: +33 4 42 65 69 00	Fax: +33 4 42 58 63 95
Germany	Tel.: +49 721 595 4607	Fax: +49 721 595 4937
Hong Kong	Tel.: +85 2-2856-3166	Fax: +85 2-2856-2962
Mexico	Tel.: +52 5 575-27-28	Fax: +52 5 575-26-86
The Netherlands	Tel.: +31(0)76 542 7 542	Fax: +31(0)76 542 8 542
Switzerland	Tel.: +41 21 791 58 28	Fax: +41 21 791 58 40
United Kingdom	Tel.: +44 1905-450500	Fax: +44 1905-450501
United States	Tel.: +1 817-277-3543	Fax: +1 817-277-3894

www.milltronics.com