



MATERIAL: SEE B/M		 JACOBY-TARBOX® A Division Of The Clark-Reliance Corporation	SIGHT FLOW INDICATOR	Section: T400
DRAWN: TFK	CHECKED: DEP		STYLE 805-S, 805-SD	Bulletin: T400.37
SCALE: NONE	DATE: 9/15/95			Date: 09/01/03
			VARIOUS PRESSURES	Supersedes: 12/01/00
			FILE NO.: T400-37.DWG	

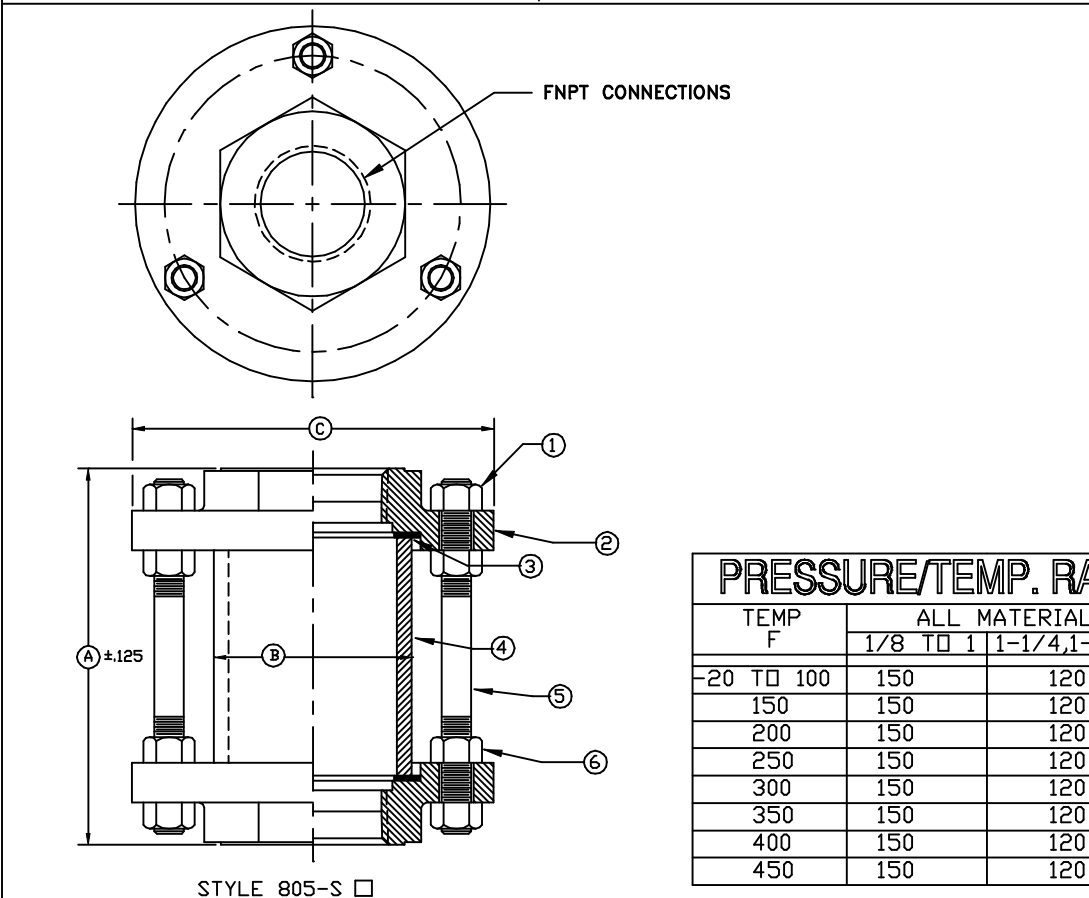

PARTS LIST				
PIECE NO.	NAME OF PART	QUAN.	MATERIAL	COMMENTS
1	NUTS	6	STEEL	
2	HEAD	2	SEE BELOW	
3	SEAL GASKET	2		
4	CYLINDER	1	A-BRONZ	
5	RODS	3	STEEL	
6	NUTS	6	STEEL	
7	INDICATOR	1		

THIS DRAWING AND ALL INFORMATION ON IT IS THE PROPERTY OF JACOBY-TARBOX, DIVISION OF THE CLARK-RELANCE CORPORATION. IT IS CONFIDENTIAL AND IS GIVEN TO YOU FOR A LIMITED PURPOSE AND MUST BE RETURNED UPON REQUEST. NEITHER THIS DRAWING NOR ANY PART OF IT NOR ANY INFORMATION CONCERNING IT MAY BE COPIED, EXHIBITED OR FURNISHED TO OTHERS NOR MAY PHOTOGRAPHS BE TAKEN OF ANY ARTICLE FABRICATED OR ASSEMBLED FROM THIS DRAWING WITHOUT CONSENT OF THE CLARK-RELANCE CORPORATION.

STANDARD OPTIONS:

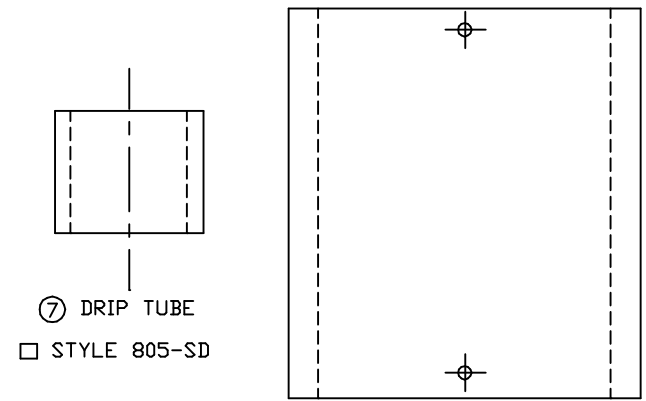

PRESSURE/TEMP. RATINGS			
TEMP F	ALL MATERIALS *		
	1/8 TO 1	1-1/4, 1-1/2	2
-20 TO 100	150	120	100
150	150	120	100
200	150	120	100
250	150	120	100
300	150	120	100
350	150	120	100
400	150	120	100
450	150	120	100

STANDARD DESIGN MATERIALS:

HEAD: ASTM A216-WCB/A515 GR 70/A36/A576 (CARBON STEEL) ☐ * BRONZE AND CAST IRON NOT RECOMMENDED FOR SERVICE ABOVE 400 F

ASTM A351-CF8M/A240/A276 (316 SS) ☐

ASTM B62 (BRONZE) ☐

ASTM A126 CLASS B (CAST IRON) ☐

FASTENERS: STEEL

DRIP TUBE: 316 SS

OPTIONAL ALLOYS FURNISHED UPON REQUEST

OPTIONAL FEATURES:

SPECIAL LENGTHS UP TO 48 INCHES AVAILABLE ("A" DIM)

PRESSURE RATINGS DECREASE WITH ADDITIONAL LENGTH

MODEL: 850-SL

SPECIAL ETCHED TUBES (VOLUME/LENGTH) PER APPLICATION

304/316 SS TRIM AVAILABLE

PSI	DIMENSIONS									
	SIZE		A		B		C		WEIGHT	
	IN	DN	IN	mm	IN	mm	IN	mm	LBS	KGS
150	1/8	15	4-1/2	114	1-3/4	44	3-3/4	95	2.0	.9
150	1/4	20	4-1/2	114	1-3/4	44	3-3/4	95	2.0	.9
150	3/8	25	4-1/2	114	1-3/4	44	3-3/4	95	2.0	.9
150	1/2	40	4-1/2	114	1-3/4	44	3-3/4	95	2.0	.9
150	3/4	50	4-1/2	114	1-3/4	44	3-3/4	95	2.0	.9
150	1	65	4-1/2	114	2	51	4-1/4	108	3.0	1.4
120	1-1/4	80	4-3/4	120	2-1/2	64	4-3/4	121	4.0	1.8
120	1-1/2	100	4-3/4	120	2-1/2	64	4-3/4	121	4.0	1.8
100	2	150	5-1/2	140	3	76	5-3/4	146	7.0	3.2