


"MRS" ELECTRICAL WIRING INSTRUCTIONS

Ensure that wiring conforms to all applicable local and national electrical codes and install unit(s) according to relevant national and local safety codes.

Electrical connection is free wire leads with a 1/2" NPT(F) conduit connection. Switching element is a hermetically sealed reed switch.

CAUTION: DO NOT exceed 1 amp @ 110 VAC or 3 amps @ 28 VDC (resistive). High current input to switch will cause permanent damage to contacts.

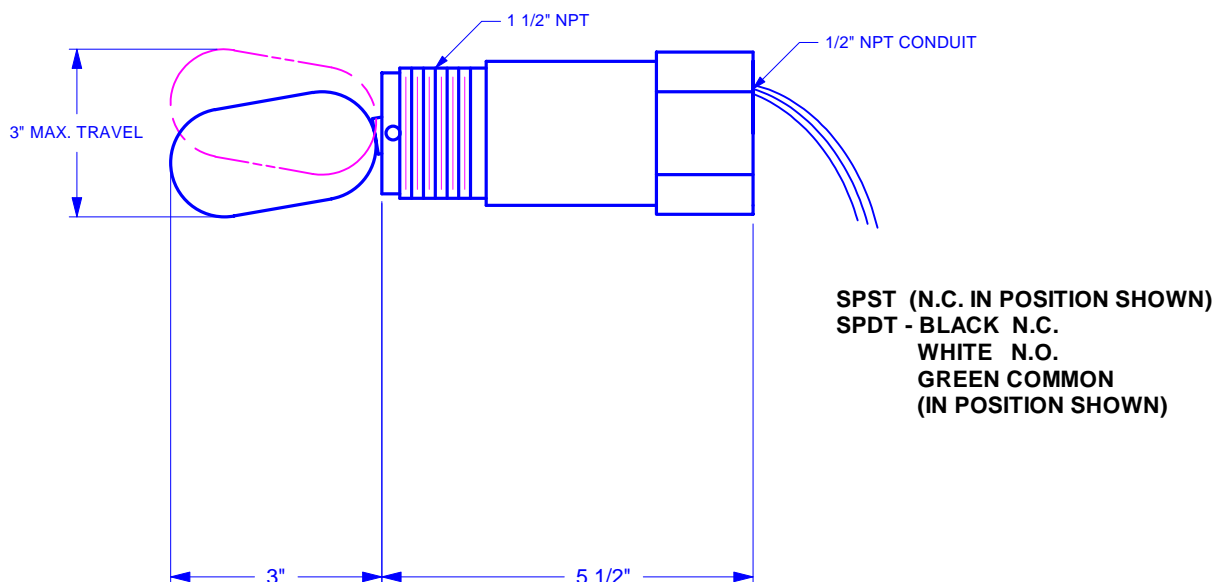

LIMITED WARRANTY

MAGNE-SONIC CORP. agrees to repair or replace any switch found defective in material or workmanship within five years from the date of shipment. This warranty is valid only if the switch was installed in accordance with Published Factory Installation Instructions, operated within the design limitations stated on the nameplate, and returned to the factory for inspection, freight prepaid, within the warranty period. No claim for labor or consequential damages will be allowed.

SERVICE POLICY

To expedite repair or replacement of returned units, the following information must be provided.

MODEL NUMBER
SERIAL NUMBER
DESCRIPTION OF PROBLEM
PROCESS CONDITIONS

Provided the units are determined to be defective as defined in the Warranty, and returned to the factory within the warranty period, we will repair or replace the returned units, at our option, without cost to the customer.

If the units are returned after the Warranty period, or not a Warranty claim, customer must approve the repair or replacement.

All returns to the Factory will be prepaid and any repairs or warranty replacements will be F.O.B Factory.