

Today's Date: \_\_\_\_\_ Requested Delivery Date: \_\_\_\_\_ Completed By: \_\_\_\_\_

Representative: \_\_\_\_\_ Customer: \_\_\_\_\_

Telephone Number: \_\_\_\_\_ Email: \_\_\_\_\_

Tag #: \_\_\_\_\_ Quantity: \_\_\_\_\_

Chamber/Flange Material: \_\_\_\_\_

Process Fluid(s): \_\_\_\_\_

Style (see below): \_\_\_\_\_ FlashProof® Chamber

Pressure (PSI) Design: \_\_\_\_\_ Max Operating \_\_\_\_\_

Temperature (°F) Design: \_\_\_\_\_ Max Operating \_\_\_\_\_

Flange Rating: 150# 300# 600# 1500# 2500#  
*(check one)*

Process Connection Size/Type: \_\_\_\_\_  
*(Note Male/Female if ST/SW Style)*

Vent/Drain Connections: \_\_\_\_\_

Minimum Specific Gravity: \_\_\_\_\_

Center-to-Center/ Visible(in): \_\_\_\_\_


Indicator Type *(check one)*: Scale: Flag Color:

WF Flag, Wide Ft/In (Std.) Yellow/Black

NightStar® (120V or 240V) m/mm Red/White

Hermetically Sealed Flag (Poly/Glass) %

Other \_\_\_\_\_

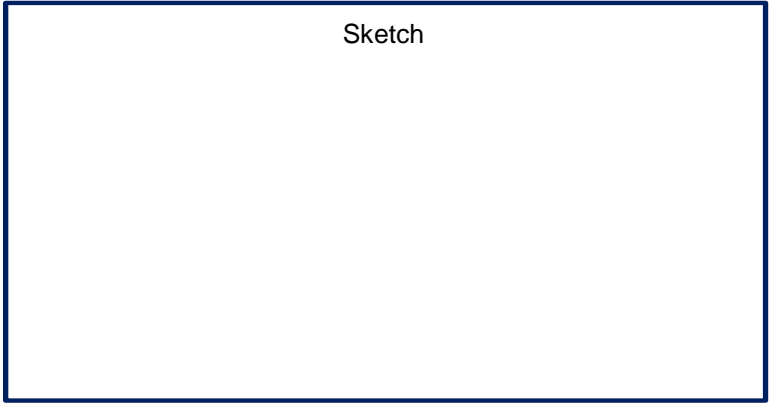

**Accessory Type *(check as many apply)***

Switches Quantity

SAS-16™ SPDT Switch \_\_\_\_\_

RS2™ SPDT Switch \_\_\_\_\_


RS2/2™ DPDT Switch \_\_\_\_\_

4-20mA Transmitters

JMT™ Magnetostrictive Measuring Length (in.): \_\_\_\_\_ (if different than visible)

RST2™ Reed Switch

**See M200.03 for JMT Application Sheet**

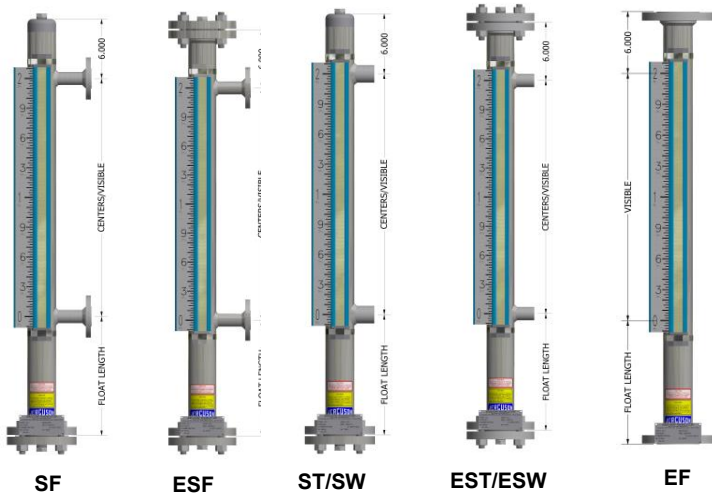

Options: Hot Insulation Electric Heat Trace

Cold Insulation Non-Frost Extension

Steam Heat Trace Magnicator Particle Trap

Comments:



\*Other Styles Available – Call for Assistance